



RE THERM GRE060C

Regeneration oven
to reheat refrigerated
food (+3°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Snap-shut door
- Adjustable feet
- Easy access to facilitate maintenance and repair
- Condensation drip tray under the door and connected to the oven drainage system.

FUNCTIONAL FEATURES

- Electromechanical controls: main switch, timer, moisture, temperature
- Simplified, user-friendly controls
- Periodic reversal of direction of rotation of the fan for better air distribution
- Automatic stopping of fans when the door is opened
- End-of-cycle buzzer
- Chamber with safety thermostat
- Operating temperature 30°C ÷ 160°C
- Removable GN2/3 tray racks

OPTIONS & ACCESSORIES

- | | |
|--|---|
| ☐ Supports | ☐ External hand shower |
| ☐ Wall brackets kit | ☐ Double-click door opening |
| ☐ Water filter system | ☐ Double low-emission glass door with internal ventilation |
| ☐ Grids | Openable inside glass of the door |
| ☐ Trays | |
| ☐ Opposite side opening | |
| ☐ Door lock with key (in combination with glass door) | |
| ☐ Drawers reserves water and drain | |

moduline

TECHNICAL INSTAL- L

Electricity supply
cable inlet



Vent for excess
humidity






Chamber drain



Softened
water inlet




Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

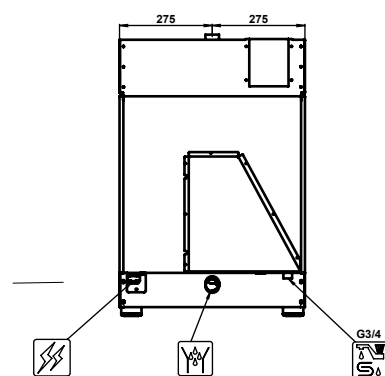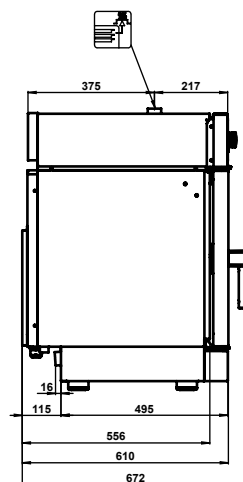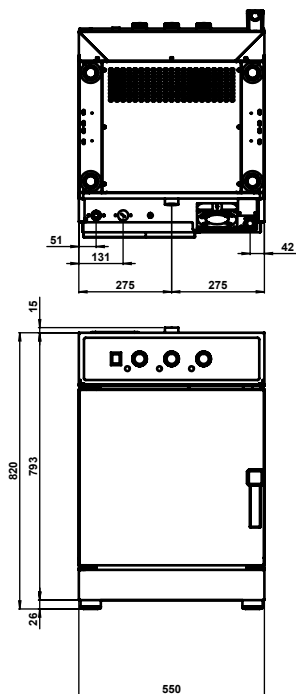

Overall dimensions (W x D x H) - mm	550 x 610 x 835 h
Trays capacity	6 x GN 2/3
Plates capacity	6 Ø 200-320
Distance [mm]	64
Power supply	AC 220-240V 50/60Hz
Working temperature [°C]	30 ÷ 160

Product max capacity [Kg]	10
Total input [kW]	3,45 (230V)
Amps. [A]	15 (230V)
Water pressure [kPa]	150 ÷ 500
Net weight [Kg]	65

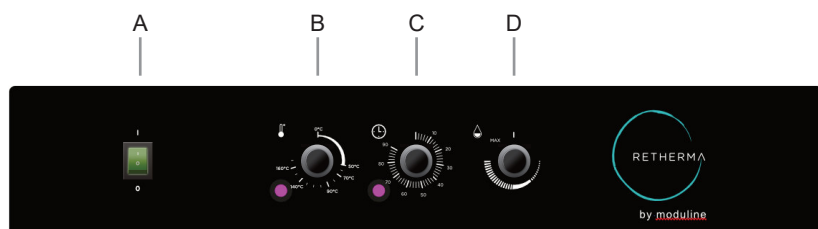

- A ON/OFF switch
- B Cavity temperature knob
- C Time setting knob
- D Cavity humidity control knob

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it